
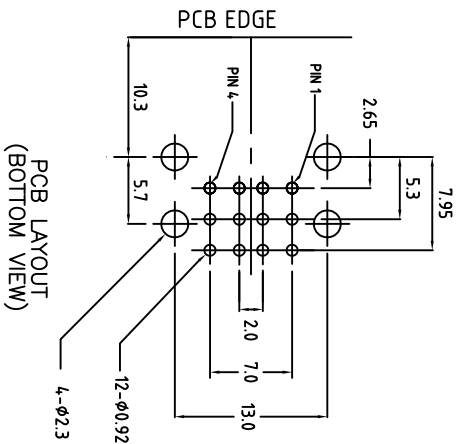


used for:

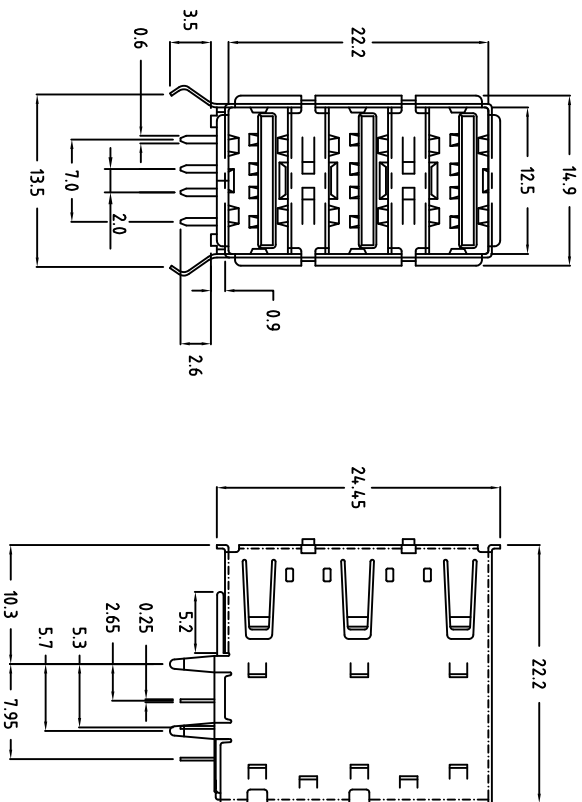

**MATERIAL:**

INSULATOR : PBT +30% GLASS FIBER (UL 94V-0)  
 CONTACT : PHOSPHOR BRONZE  
 CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,  
 WITH ENTIRE CONTACT NICKEL UNDERPLATED  
 SHELL : BRASS, NICKEL PLATED  
 @BACK SHELL : STEEL, NICKEL PLATED  
 BOTTOM COVER : NYLON, BLACK

**SPECIFICATION:**

CURRENT RATING : 1.5AMP  
 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC  
 INSULATION RESISTANCE : 1000MΩ MIN.  
 CONTACT RESISTANCE BEFORE : 30mΩ MAX  
 CONTACT RESISTANCE AFTER : 50mΩ MAX  
 OPERATING TEMPERATURE : -20°C ~ +85°C



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.

DO NOT ALTER CAD DRAWING BY HAND		tolerance	finish	scale:
Denote: .xxx	unless otherwise specified tolerance shall be as follow	Angles:	Dim. in mm	material: SEE MATERIAL
rev./description	a	1	date	title:
1	origin	1	2006	USB Connector A female type
Oct/25/06	K.Santangelo	draw:	May 09	PCB R/A (Triple)
		appd:	May 09	R. Santangelo
		norm:		RoHS compliant
		d-old		drawing no.:
				AutocAD 2005
				DIN A3
				sheet 1/1
				part no.:
				39K1A243
				33UBAR-TSNIR



8 7 6 5 4 3 2 1